


# LED SHROUD WARNING LIGHT

*PY-9664SS-1*


Please clean the lighter socket and contact surface before mounting the shroud light. Using the suction cups supplied to mount the shroud light to the windshield.

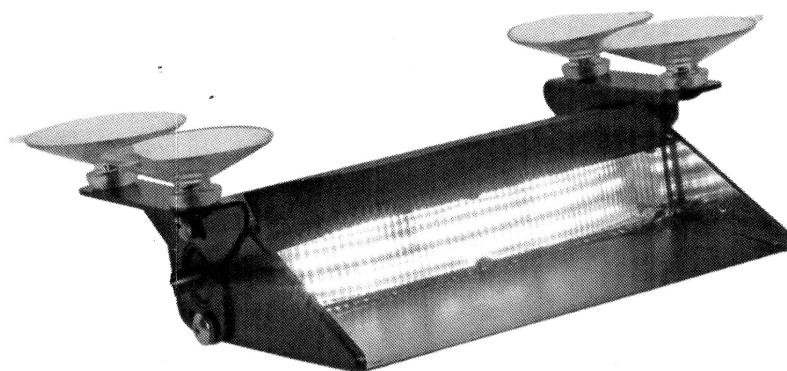

After the light is securely installed, loosen the adjusting screws located on each end and tilt the light to the desired angle. Then tighten the fixed hitch. Turn the light on and check the light from the front or rear of the vehicle, through the windows, to ensure that it is at the most desirable angle, and that the light is not impeded by any obstacles and/or window tinting. **CAUTION: Be certain that you have selected a mounting location that will not interfere with the deployment of the vehicle's airbags, does not obstruct the driver's vision and allows safe operation of the vehicle. Check the chosen mounting location to ensure that the vehicle's structure and material is adequate to support the weight of your light.**

## Operating Instruction

- Operate Voltage 10~30VDC
- Fuse 2A inside the cigar plug
- 13 patterns

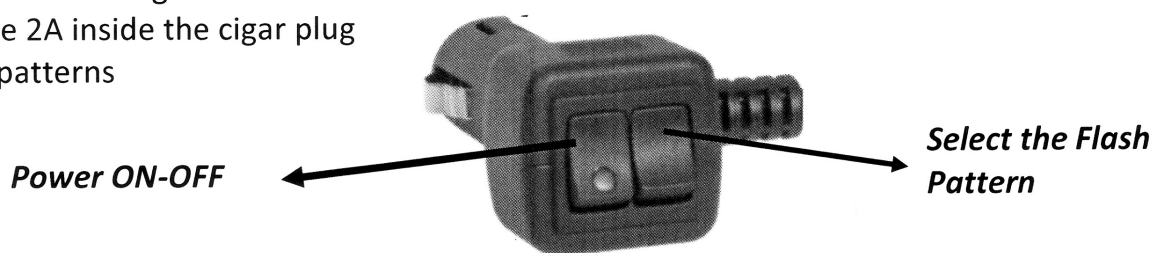

PA1	ECE R65 120FPM Single Flash P1	PA2	ECE R65 120FPM Single Flash P2
PA3	ECE R65 120FPM Double Flash P1	PA4	ECE R65 120FPM Double Flash P2
PA5	ECE R65 120FPM Quad Flash P1	PA6	ECE R65 120FPM Quad Flash P2
PA7	Single Flash 75 (SIM) P1	PA8	Single Flash 75 (SIM) P2
PA9	Double Flash 75 (SIM) P1	PA10	Double Flash 75 (SIM) P2
PA11	Quad Flash 75 (SIM) P1	PA12	Quad Flash 75 (SIM) P2
PA13	OFF		